

Tred-MOR[®]

CARPET CUSHION

Tred-MOR[®] 1562 with Quik-LIFT[®] SPECIFICATIONS

SPECIFICATION DATA

Product Code:	BV0173
Product Name:	Tred-MOR [®] 1562
Traffic Classification:	Extra-Heavy
Material Weight:	62 oz./sq. yd.
Density:	33 lbs./cu. ft.
Thickness:	0.156"
Product Dimensions:	54" x 60' (30 sy.)
Mfg. Tolerances:	Width: +/-1% Thickness: +0.030/-0.015
Approx. Shipping Wt.:	124 lbs. per roll
Color:	Black
Material Content:	Made with Synthetic Rubber
Design Configuration:	Flat/Flat
Backing Top:	Spunbonded
Backing Bottom:	Quik-LIFT [®]
Antimicrobial:	Guardian [™]
Moisture Resistant:	98%
StainSTOP [™] :	Yes
Indoor Air Quality:	CRI Green Label Plus-certified


COMFORT AND DURABILITY

CLD PSI @ 25% Deflec. Min.:	7 (Method 601/12151)
CLD PSI @ 65% Deflec. Min.:	45 (Method 601/12151)
Breaking Strength PSI Length:	45 (Min. ASTM-D2646)
Breaking Strength PSI Width:	41 (Min. ASTM-D2646)
Compression Set:	15%

FLAME CERTIFICATION

Pill Test:	Pass (DOC-FF 1-70)
Smoke chamber:	Pass
Flooring Radiant Panel:	*

*Not applicable to separate carpet cushion. Carpet must be tested in composition with cushion.

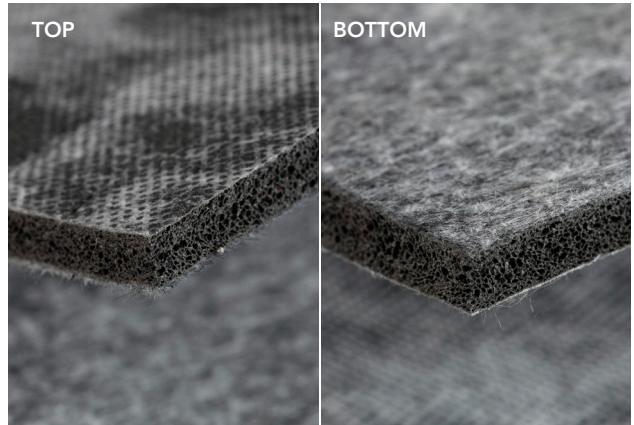

ACOUSTICAL PERFORMANCE

Impact Insulation Class (IIC):	71 (ASTM-492)
Impact Noise Rating (INR):	20 (ASTM-492)
Sound Absorption (NRC):	0.30 (ASTM C423-81)

THERMAL INSULATION

R-Value:	0.270
K-Value:	0.577

OTHER

Meets Federal Spec.:	Class I (ZZ-00811B, Type I)
Electrostatic:	3.4 (AATCC-134)
Toxicity:	No more toxic than wood – an accepted industry standard

PRODUCT FEATURES

Tred-MOR is the nation's premium commercial carpet cushion. It is synonymous with Dubl-Stik[®], and is the benchmark by which all others are measured. When using Tred-MOR with Quik-LIFT, the installation will be faster and the removal quicker and easier during replacement.

