

# Tred-MOR<sup>®</sup>

## CARPET CUSHION

### Tred-MOR<sup>®</sup> 2568 with Quik-LIFT<sup>®</sup> SPECIFICATIONS

#### SPECIFICATION DATA

Product Code:	BV0176
Product Name:	Tred-MOR <sup>®</sup> 2568
Traffic Classification:	Heavy
Material Weight:	68 oz./sq. yd.
Density:	22 lbs./cu. ft.
Thickness:	0.250"
Product Dimensions:	54" x 60' (30 sy.)
Mfg. Tolerances:	Width: +/-1% Thickness: +0.030/-0.015
Approx. Shipping Wt.:	138 lbs. per roll
Color:	Black
Material Content:	Made with Synthetic Rubber
Design Configuration:	Flat/Flat
Backing Top:	Spunbonded
Backing Bottom:	Quik-LIFT <sup>®</sup>
Antimicrobial:	Guardian <sup>™</sup>
Moisture Resistant:	98%
StainSTOP <sup>™</sup> :	Yes
Indoor Air Quality:	CRI Green Label Plus-certified


#### COMFORT AND DURABILITY

CLD PSI @ 25% Deflec. Min.:	3 (Method 601/12151)
CLD PSI @ 65% Deflec. Min.:	20 (Method 601/12151)
Breaking Strength PSI Length:	45 (Min. ASTM-D2646)
Breaking Strength PSI Width:	41 (Min. ASTM-D2646)
Compression Set:	17.5%

#### FLAME CERTIFICATION

Pill Test:	Pass (DOC-FF 1-70)
Smoke chamber:	Pass
Flooring Radiant Panel:	*

\*Not applicable to separate carpet cushion. Carpet must be tested in composition with cushion.

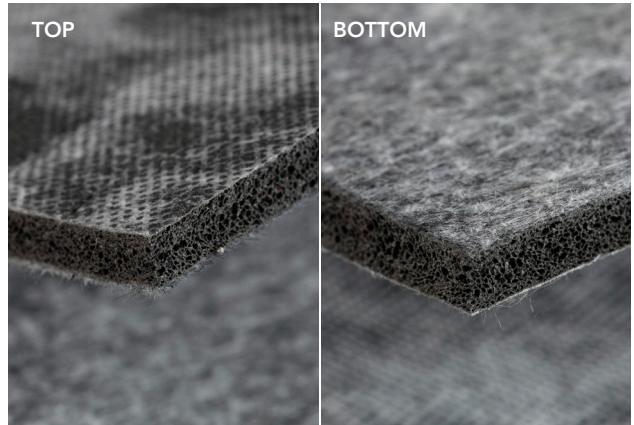

#### ACOUSTICAL PERFORMANCE

Impact Insulation Class (IIC):	75 (ASTM-492)
Impact Noise Rating (INR):	24 (ASTM-492)
Sound Absorption (NRC):	0.35 (ASTM C423-81)

#### THERMAL INSULATION

R-Value:	0.460
K-Value:	0.534

#### OTHER

Meets Federal Spec.:	Class II (ZZ-00811B, Type I)
Toxicity:	No more toxic than wood – an accepted industry standard

#### PRODUCT FEATURES

Tred-MOR is the nation's premium commercial carpet cushion. It is synonymous with Dubl-Stik<sup>®</sup>, and is the benchmark by which all others are measured. Tred-MOR can also be used in conventional stretch-in installation, and is available with Quik-LIFT backing.

